




# **HYPERDRIVE<sup>®</sup>**

## **GEN2 15 Port**

### **USB-C Dock**

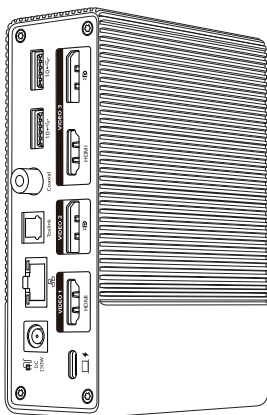

**USER GUIDE**

# Table of Contents

<b>Safety Instructions</b>	<b>1</b>
<b>Copyright</b>	<b>1</b>
<b>Trademarks</b>	<b>2</b>
<b>Regulatory Compliance</b>	<b>2</b>
FCC Conditions	2
CE	2
WEEE Information	3
<b>Introduction</b>	<b>3</b>
<b>Package Contents</b>	<b>3</b>
<b>Port Overview</b>	<b>4</b>
<b>Powering the Dock</b>	<b>6</b>
<b>Connect the Dock to Your Laptop</b>	<b>6</b>
<b>LED Indicator Guide</b>	<b>7</b>
<b>Multi-Display Support</b>	<b>7</b>
<b>Specifications</b>	<b>8</b>
<b>System Requirements</b>	<b>10</b>

Before attempting to connect, operate or adjust this product, please save and read the User Guide completely. The style of the product shown in this User Guide may be different from the actual unit due to various models.

## **Safety Instructions**

Always read the safety instructions carefully:

- Keep this User Guide for future reference
- Keep this equipment away from humidity
- If any of the following situation arises, get the equipment checked by a service technician:
  - The equipment has been exposed to moisture.
  - The equipment has been dropped and damaged.
  - The equipment has obvious sign of breakage.
  - The equipment has not been working well or cannot get it to work according to the User Guide.

## **Copyright**

This document contains proprietary information protected by copyright. All rights are reserved. No part of this guide may be reproduced by any mechanical, electronic or other means, in any form, without prior written permission of the manufacturer.

# Trademarks

Hyper, the ++Hyper logo, and HyperJuice, are trademarks or registered trademarks of Targus International LLC in the U.S. and in certain other countries. Windows is a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. macOS is a trademark of Apple Inc., registered in the U.S. and other countries. Chrome OS is a trademark of Google LLC. All logos and registered trademarks are the property of their respective owners.

# Regulatory Compliance

## FCC Conditions

This equipment has been tested and found to comply with Part 15 Class B of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received and include interference that may cause undesired operation.

## CE

This equipment is in compliance with the requirements of the following regulations: EN 55032/EN 55024: CLASS B

## WEEE Information

For EU (European Union) member users: According to the WEEE (Waste electrical and electronic equipment) Directive, do not dispose of this product as household waste or commercial waste. Waste electrical and electronic equipment should be appropriately collected and recycled as required by practices established for your country. For information on recycling of this product, waste disposal service or the shop where you purchased the product.




## Introduction

The HyperDrive GEN2 15 Port USB-C Dock features 15 ports for maximum peripheral expansion, and driverless plug and play triple extended display support for an incredibly versatile connectivity solution.

## Package Contents

- HyperDrive GEN2 15 Port USB-C Dock
- 80cm/2.62ft USB-C to USB-C Full Functional Cable
- 150W DC Power Adapter
- User Guide

# Port Overview

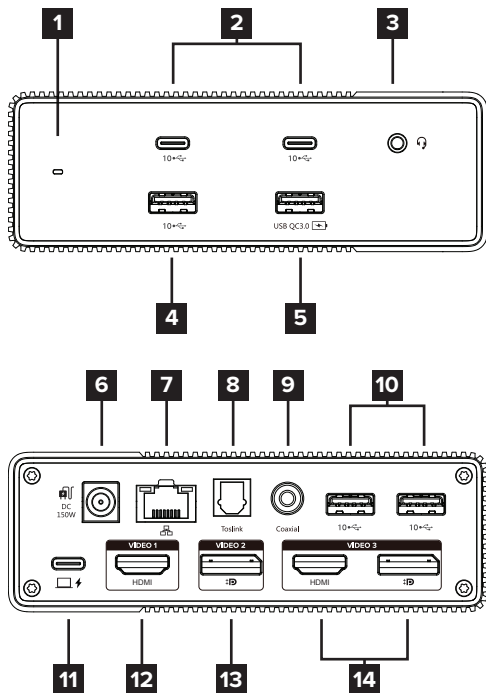


Item	Description
1. LED Indicator	Indicates a successful power connection
2. USB-C Port	Connects to a USB-C device
3. 3.5mm Audio Combo Jack	Connects to a headset
4. USB-A Port	Connects to a USB-A device
5. USB-A QC Port	Quick charges USB-A device
6. DC Power In	Connects to 150W DC Power Adapter
7. RJ-45 Port	Connects to Ethernet network
8. Toslink Port	Connect to the speaker
9. Coaxial Port	Connect to the speaker
10. USB-A Port	Connects to a USB-A device
11. USB-C Host Port	Connects to a laptop
12. Video 1 Port	Connects to a HDMI monitor
13. Video 2 Port	Connects to a DisplayPort monitor
14. Video 3 Port	Connects to a HDMI or DisplayPort monitor

# Powering the Dock

HyperDrive GEN2 15 Port Dock is powered by a 150W DC Power Adapter.

## Connect the Dock to Your Laptop

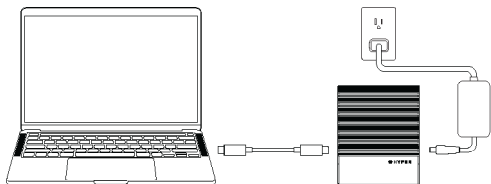



# LED Indicator Guide

The LED light will turn on when HyperDrive is powered in bus-power mode or through an external DC power adapter.

## Multi-Display Support

Up to triple extended display output is supported if the host device supports Multiple Steam Transport (MST).

The 3rd display is either DP or HDMI. If both are connected, DP will have priority over HDMI.

1 extended display: 4K 60Hz\* MAX

2 extended displays: 4K 30Hz + 4K 30Hz\* MAX

3 extended displays: 4K 30Hz + 4K 30Hz + 1080p\* MAX

\* Max resolution can be achieved if the host device supports DP1.4 & DSC ON.

# Specifications

Interface:	USB-C (Host)	USB 3.1 Gen2 10Gbps, 100W PD Passthrough, 4K60Hz DP1.4 DP Alt Mode
	DisplayPort x 2	MAX 4K 60Hz, HDR, DP++
	HDMI x 2	MAX 4K 60Hz, HDR, HDCP1.4, 2.3
	USB-C x 2 (Front)	10Gbps, 7.5W Each Port, Max 15.0W
	USB-A x 3	10Gbps, 7.5W Each Port, Max 13.5W
	USB-A QC (Front)	Charging only, QC3.0 Max 24W, BC1.2 Max 7.5W, Apple Max 12W. This port works only when the DC power supply is connected.
	RJ45	Gigabit Ethernet, 10/100/1000 Mbps
	Toslink / Coaxial	Digital audio, Max 96KHz/24bit sampling rate.
	3.5mm Combo Audio Jack (Front)	Headphone, Speaker+Microphone Combo, Max 96KHz 24bit sampling rate.

Power:	Power Mode	Self-powered
	DC Power IN	DC Power Adapter, Input: AC 100~240V Output: DC 150W, 20.5V ~ 7.31A
Power Delivery:	USB-C Host Port	Max 100W PD Passthrough charging to Host Laptop
	USB-A QC Port	Max 24W QC Charging USB-A device (12V~2A)
Protection:	Over-current, Over-voltage, Over-temperature, Short-circuit Protection	
Dimension & Weight:	Length:	132.07 mm / 5.20 inch
	Width:	89.5 mm / 3.52 inch
	Height:	44 mm / 1.73 inch
	Weight:	580g / 1.27lb

# System Requirements

- The host device's USB-C port must support Power Delivery, DisplayPort Alt Mode and USB-C 3.2 Generation 1 or 2.
- Up to 3 Extended Displays are supported on Windows and Chrome OS only as MST (Multi-Stream Transport) is required. macOS does not support MST.
- Up to 3 Mirrored Displays are supported on Windows, Chrome OS and macOS.
- 4K 60Hz requires that your USB-C port and monitor to support DP 1.4 and DSC.
- Full dock functionality depends on the host computer's capabilities. Please contact your host device manufacturer to confirm external display, host charging, and USB device support.

## **Product Compatibility**

Windows PC, MacBook, Chromebook

## **Operating System**

Windows 7 and above, Chrome OS, macOS 10.6 and above.

(This page is intentionally blank)

## **2 YEARS LIMITED WARRANTY**

PORTUGAL AND SPAIN CUSTOMERS: 3 YEARS LIMITED WARRANTY OR AS REQUIRED BY LOCAL LAWS.

We pride ourselves on the quality of our products. For complete warranty details and a list of our Worldwide offices, please visit [www.HyperShop.com](http://www.HyperShop.com). Hyper product warranty does not cover any device or product that is not manufactured by Hyper (including, but not limited to, laptops, smartphones, devices, or any other product that may be used in connection with the Hyper product). Hyper Limited Warranty provided is subject to any rights and remedies the purchaser may have under local laws. Australian customers: For complete warranty details, see warranty statement enclosed.

## **2 ANS DE GARANTIE LIMITÉE**

CLIENTS DU PORTUGAL ET DE L'ESPAGNE: GARANTIE LIMITÉE DE 3 ANS OU TEL QUE REQUIS PAR LES LOIS LOCALES.

Nous sommes fiers de la qualité de nos produits. Pour des détails complets sur la garantie et une liste de nos bureaux à l'échelle mondiale, veuillez visiter [www.HyperShop.Com](http://www.HyperShop.Com). La garantie du produit Hyper ne couvre aucun appareil ou produit qui n'est pas fabriqué par Hyper (y compris, mais sans s'y limiter, les ordinateurs portables, les smartphones, les appareils ou tout autre produit pouvant être utilisé en connexion avec le produit Hyper). La Garantie Limitée Hyper fournie est soumise à tous les droits et recours que l'acheteur peut avoir en vertu des lois locales. Clients australiens: Pour les détails complets de la garantie, consultez la déclaration de garantie ci-jointe.

## **2 AÑOS DE GARANTÍA LIMITADA**

**PARA CLIENTES PORTUGUESES Y ESPAÑOLES: GARANTÍA LIMITADA DE 3 AÑOS O SEGÚN LO REQUIERA LA LEGISLACIÓN LOCAL**

Estamos orgullosos de la calidad de nuestros productos. Para obtener detalles completos de la garantía y una lista de nuestras oficinas globales, visite [www.HyperShop.Com](http://www.HyperShop.Com). La garantía de los productos desde Hyper no cubre ningún dispositivo o producto que no haya sido fabricado por Hyper (incluyendo pero no limitada a los ordenadores portátiles, teléfonos inteligentes, dispositivos o cualquier otro producto que pueda utilizarse junto con los productos desde Hyper). La garantía limitada de Hyper proporcionada está sujeta a cualquier derecho y recurso que el comprador pueda tener bajo las leyes locales. Clientes australianos: Para obtener todos los detalles completos de la garantía, consulte la declaración de garantía adjunta.

## **AUSTRALIAN AND NEW ZEALAND CONSUMERS ONLY**

Thank you for your purchase. Hyper warrants to the original purchaser that its products are free from defects in materials and workmanship and, during the specified warranty period, and lasts as long as the original purchaser owns the product. The warranty period is stated on the packaging or in the documentation provided with this Hyper product. Hyper's Limited Product Warranty excludes damage caused by accident, neglect, abuse, misuse, improper care, normal wear and tear, ownership transfer, or alteration. The limited warranty also excludes any product that is not manufactured by Hyper (including, without limitation, laptops, smartphones, devices, tablets, or any other non-Hyper item) that is used in connection with the Hyper product. In the event that the Hyper product has a defect in materials or workmanship Hyper will, after receiving a warranty claim and inspecting the product, at its discretion, do one of the following: repair, replace, or refund with the same or a similar product (or part) of no lesser quality and ship it to the original purchaser at Hyper's expense. As part of this inspection, proof of purchase will be required. There is no charge for inspection. To make a warranty claim, please contact Hyper Australia or New Zealand (see details below), or return the product to the place of purchase. The original purchaser must bear the cost of the delivery to Hyper. Under Australian and/or New Zealand Consumer Laws, in addition to any warranty Hyper gives, our products come with guarantees that cannot be excluded. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are entitled to have the products repaired or replaced if they fail to be of acceptable quality and the failure does not amount to a major failure.

For any warranty question, contact Targus Australia Pty. Ltd. (i) by mail at Suite 2, Level 8, 5 Rider Boulevard, Rhodes NSW 2138, by phone AUS 1800 641 645 or NZ 0800 633 222 or by Email: [infoaust@targus.com](mailto:infoaust@targus.com). For additional information, check out our website at [targus.com/au/warranty](http://targus.com/au/warranty).



# TECHNICAL SUPPORT

**For technical questions, please visit:**

Hyper Customer Support Email: [support@hypershop.com](mailto:support@hypershop.com)

Hyper Customer Support Phone:

1-888-202-1888 (USA); +1-408-737-7878 (non-USA)

US Internet: <http://targus.com/us/support>

Canada Internet: <http://www.targus.com/ca/support>

Australia Internet: <http://www.targus.com/au/support>

Email: [infoaust@targus.com](mailto:infoaust@targus.com)

Telephone: 1-800-641-645

New Zealand Telephone: 0800-633-222

Latin America Email: [latam.soporte@targus.com](mailto:latam.soporte@targus.com)

